



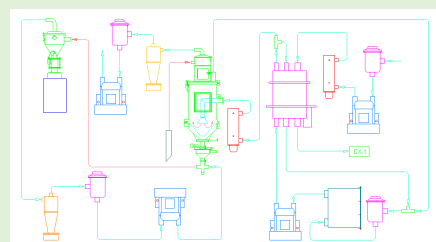

ALL-IN-ONE DRY SYSTEM H LDS-03~40 HLDG-03~40

ITEM	MODE	H LDS-30	H LDS-60	H LDS-100	H LDS-150	H LDS-200	H LDS-300	H LDS-400	
		HLDG-30	HLDG-60	HLDG-100	HLDG-150	HLDG-200	HLDG-300	HLDG-400	
DRYING CAPACITY	M ³ /HR	30	60	100	150	200	300	400	
DRYING BLOWER	KW	0.2	0.5	0.85	1.1	1.9	2.6	3.7	
							0.75	1.5	
REGENERATIVE BLOWER	KW	2.5	2.5	3.5	4.5	5.5	9	10	
REGENERATIVE HEATER	KW	0.1	0.2	0.5	0.5	0.5	0.85	1.1	
TEMP. RANGE	KW	2.5	3.5	4.5	5.5	6.5	10	12	
STAINLESS STEEL DRYER HOPPER	KG	30	60	100	150	200	300	400	
AUTO LOADERS	PRIMARY	KW	0.85	0.85	1.1	1.1	1.1	1.9	1.9
	SECONDARY	KW	0.85	0.85	1.1	1.1	1.1	1.9	1.9
PRIMARY LOADER	MAGNETIC LEVEL SENSOR	P-3	P-3	P-3	P-3	P-6	P-6	P-6	
SECONDARY LOADER	ELECTRIC LEVEL SENSOR	EL-1	EL-3	EL-3	EL-3	EL-6	EL-6	EL-6	
3 IN 1 TYPE	DIMENSION	W-CM	550	680	750	750	850	900	900
		D-CM	990	1080	1250	1250	1350	1760	1760
		H-CM	1720	2050	1750	2100	2100	2100	2200
	APPROX. WEIGHT	KG	220	380	450	475	550	650	700
CONNECTION PIPING	VACUUM AIR	INCH	1.5	1.5	1.5	1.5	2	2	2
	MATERIAL INLET	INCH	1.5						
	COMPRESSED AIR	INCH	3/4 AT 4KG/CM ²						
COOLING WATER PIPING	INCH	3/8	3/8	1/2	1/2	1/2	1/2	1/2	
	L / MIN	8	10	12	12	15	20	25	
	KG / CM ²	1 ~ 2							
TOTAL LOAD OF POWER	KW	6	8.4	11.5	13.8	16.5	24	29.8	
							22.2	26.4	

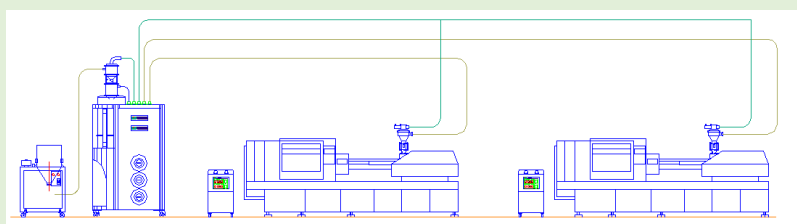

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE ◦

SPECIAL POWER AND DESIGN UPON REQUEST ◦

SPECIAL DESIGN UPON REQUEST ◦

H LDS FOR STANDER TYPE ◦ HLDG FOR LIGHT GUIDE PLATE MOLDING ◦